

MIO MVS-4HD

Mini Box Quad HD/SD-SDI Multi-viewer



MIO MVS-4HD is a low cost miniature box multi-viewer system. MIO MVS-4HD supports 4ch. HD/SD auto adaptive inputs. 1 DVI/HDMI (up to 1920x1080) with 1 duplicated HDSDI Outputs. It is a small multi-view display system with rich features, such as real time audio/video monitoring, dynamic UMD & tally, UV meter. Built in WEB server provides an easy control and supports SMNP and TSL protocol.

MIO MVS-4HD is a perfect cost-effective display solution for broadcast and pro AV applications.



- Support 525i, 625i, 720p, 1080i, 1080p and automatic detection of input format
- Support HD/SD-SDI signal with embedded audio.
- Output resolutions, up to 1920x1080p
- Flexible output options: 4:3, 16:9, customized aspect ratio, provide 4:3 or 16:9 safe maker
- Selectable air timer and countdown timers, analog and digital clocks types
- Any channel can be enlarged to full screen
- Dynamic UMDs & Tally from routers and Switchers
- Static programmable multi-color UMD
- Support TSL and SNMP protocol
- Alarming of frozen or black video, video losing, and audio silence or losing
- Built-in WEBSERVER
- Indicate LED lights for input and power status
- Quick key configured on box to recall layout and switch resolutions


Gefei Technology Co., LTD

Headquarters: A-603 Power Creative Plaza,
NO.1 Shangdi E. Rd., Haidian District, Beijing, P.R.China
Email: Sales@gefei-tech.com WEB:www.gefei-tech.com

International office:
266 Sargent Rd. Boxborough, MA 01719, USA
Tel: 001 508 473 3080, Fax: 001 978 263 0789



Easy WEB Setting U I & High Point

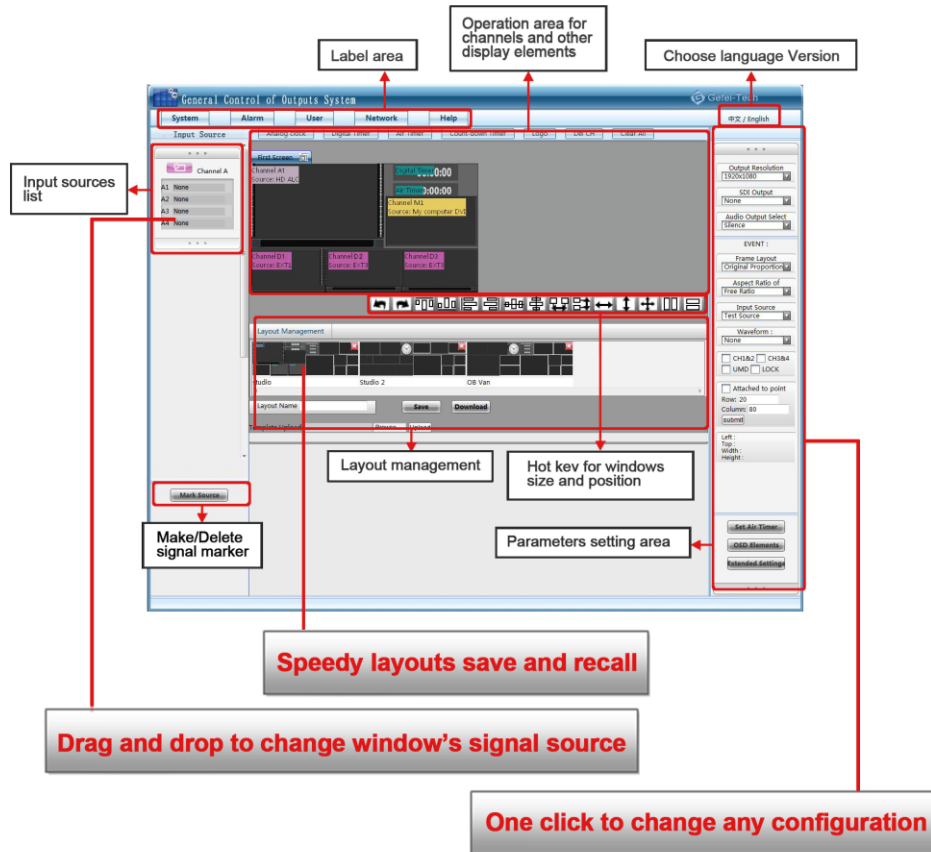

The screenshot shows the 'General Control of Outputs System' web interface. Key features and callouts include:

- Label area:** Points to the top navigation bar (System, Alarm, User, Network, Help).
- Operation area for channels and other display elements:** Points to the central video preview area.
- Choose language Version:** Points to the language selection dropdown (zh / English).
- Input sources list:** Points to the left sidebar menu.
- Make/Delete signal marker:** Points to a button in the bottom left.
- Layout management:** Points to the 'Layout Management' section.
- Hot key for windows size and position:** Points to a keyboard icon in the control bar.
- Parameters setting area:** Points to the right sidebar configuration panel.
- Speedy layouts save and recall:** A red callout box pointing to the 'Save' and 'Download' buttons.
- Drag and drop to change window's signal source:** A red callout box pointing to the video preview area.
- One click to change any configuration:** A red callout box pointing to the 'Set All Times' button.

Back Interface





Technology Specifications

Number of Video Input	4* 3G/HD/SD/CVBS
Video Input Format	SD: 480i 59.94, 576i 50 HD: 720p 50Hz/60Hz 1080i 50Hz/60Hz 1080p 24Hz/25Hz/30Hz 1080p 50Hz/60Hz
Number of video Output	1*HDSDI+1*DVI/HDMI
DVI output Format	DVI interface (Female),Support HDMI/DVI Output resolutions : 1024x768, 1280x720, 1280x768 1280x1024, 1360x768, 1400x1050 1600x1200, 1680x1050, 1920x1080
SDI output Format	720p 1080i 1080p
Control	Ethernet: RJ45 interface, for WEB configure\TSL protocol\SNMP protocol RS232/GPI: DB15 RS232 for TSL protocol GPI for Talley
Physical	Power: 12V 12A Dimension: 122mm *152mm*30mm

Ordering information

MIO MVS-4HD Mini box quad multi-viewer with 4 HD/SD inputs, one DVI/HDMI (up to 1920x1080) with duplicated HDSDI Outputs

MIO MVS-4HDMI Mini box quad multi-viewer with 4 HDMI inputs, one DVI/HDMI (up to 1920x1080) with duplicated HDSDI Outputs