

JVC

Blu-ray Disc™ & 500GB HDD Recorder

SR-HD2500



**Professional Blu-ray & HDD Combo Recorder
Featuring HD-SDI I/O Interface and Direct Recording
from a Source to a Disc.**



SR-HD2500 is a Blu-ray Disc™ Recorder packed with features that will make your job easier.



The SR-HD2500 offers comprehensive support of a wide variety of video camera formats. But that's just the beginning. Basic editing is available, as well as easy application of custom backgrounds and menus when burning a disc. And with the addition of an HD-SDI input/output terminal, it is now possible to burn content directly to Blu-ray Disc™ without having to first save to HDD. Whether the original source is analog (SD) or digital, in a broad range of signal formats, Blu-ray Disc™ creation is fast, direct, and simple.

Optimized for studio and professional applications

■ HD-SDI interface

The SR-HD2500 is equipped with an HD-SDI input/output that interfaces not only SD (Based on SMPTE259) but also HD (Based on SMPTE292) stream. Since the HD-SDI terminal transfers signals at 1.5Gbps, it is possible to input HD signals directly at high speed for recording. You can connect the unit to a SDI system without using any converter or peripheral device.




Note: Recorded BD format via SDI input is BDAV only.

■ Time code

Time code information embedded in SDI signal can be displayed while recording (in EE signal) by selecting the time code mode. When the recording is burned to a disc, the selected time code can be displayed on the screen during playback.

Fits into a variety of workflows in a wide range of visual enterprises

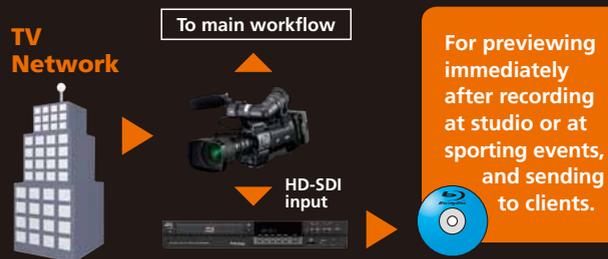

■ Time stamp

Time/date information can be recorded and displayed on-screen even when there is no time code information embedded in SDI signal. Basic time/date information such as Apr.05.2012 12:34:56 (SR-HD2500US) or 05.04.2012 12:34:56 (SR-HD2500EU) is generated from the clock in the SR-HD2500 and recorded onto the screen as digital time stamp. This is especially convenient for surveillance, medical usage, academic research, and law enforcement applications.

■ Direct recording from various analog/digital inputs to BD/DVD

Regardless of whether SD or HD, signals can be burned directly to Blu-ray (or DVD) disc. Video/S-video, DV, HDV, SD-SDI, and HD-SDI input source signals are supported. This function will save time by making it unnecessary to store the content to HDD before burning to disc, and it helps avoid any issues of content being left unerased on HDD by mistake. This smart versatility will prove indispensable for content creators and production houses

Note: Direct recording after up-conversion is not possible.

■ Convenient interfaces

Interfaces such as USB, SDHC/SD slot and IEEE1394 (HDV/DV) are featured on the front of the unit to facilitate convenient connection to camcorders and HD cameras. SDHC/SD card slot is capable of direct playback of multiple file formats including AVCHD, and that of HD Everio camcorder (HD/SD MPEG-2).



The following I/O connectors are on the back of the unit.


- Inputs: SDI, S-Video, composite video, and analog audio.
- Outputs: SDI, SDI through, HDMI, component, S-Video, composite video, analog audio, and optical digital audio.

■ Importing MOV files

MOV files (19Mbps, 25Mbps and 35Mbps) that are recorded using JVC ProHD camcorders such as the GY-HM700 series and GY-HM100 series can be imported into the SR-HD2500's HDD by converting them to a MPEG-2 TS video format, or dubbed onto discs*.

*Dubbed disc may not be in accordance with the official Blu-ray specifications depending on the conditions.

TV Network

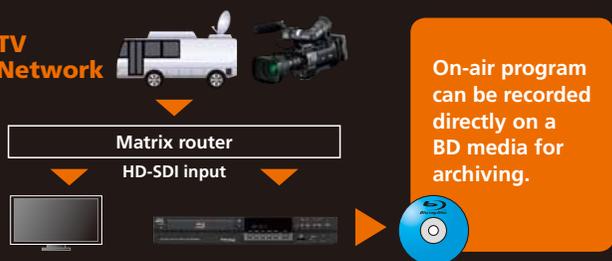

Event Organizer / Wedding



Supported disc recording/playback formats

Recordings of video and still images can be made on BD-RE, BD-R, DVD-R, and DVD-RW discs. For DVD discs, VR and Video recording formats are available. Unused discs and SD cards can be formatted on the deck. The SR-HD2500 plays titles stored on the HDD, videos on all of the aforementioned discs as well as commercially available BD-Video and DVD-Video titles* plus music CDs.

*Offering 1080/24p HDMI output

Create menu-supported Blu-ray discs

Blu-ray discs can be created using the BDMV (with menu) format; BDAV discs can also be created and dubbed if necessary. The deck is compatible with dual-layer 50GB Blu-ray discs, and records up to 24 hours (AE mode) of full high-definition video on a single disc. Writing onto inexpensive LTH discs is also supported.

Simple yet convenient editing and dubbing of HD content

Edit functions

Simplified editing is possible without the use of a PC. Editing functions include creating a playlist*, editing a thumbnail or chapter, delete scenes*, divide* and more. Of course the names of disc, title or group name can be changed with ease.

*Content in HDD only



Playlist Edit on-screen display

Flexible recording functions

Even without a PC, it is possible to copy video recordings directly onto a Blu-ray disc from an HD camcorder or down-convert video recordings and record them onto a DVD.



Share HD content #1: Edit and record footage from HD/SD camera to a disc via the HDD and share

Entire Disc Dubbing function

An entire Blu-ray or DVD disc can be dubbed* onto another blank disc, regardless of whether the content is HD or SD.



Share HD content #2: Dub HD/SD content onto another disc in high-speed and share

*Some restrictions may apply.

High-speed Dubbing function for prompt delivery to clients

The time it takes to dub HD content from the internal HDD onto a Blu-ray or DVD disc can be shortened significantly via the high-speed dubbing function that enables recording at a maximum speed of x32*. Make use of BD or DVD disc that supports high-speed recording.

*Using a BD-R 4x disc recorded in AE mode.

Equipped with external control RS-232C terminal

For usage in specialized PC controlled systems, the deck is equipped with an RS-232C terminal that enables external control via PC.



User-friendly features to help get the job done

Create Repeat Playback discs

Disc authoring for professional applications, such as creating discs that repeat playback automatically or demonstration discs, can be performed.

Last Function Memory and Resume functions

Mode Lock and Disc Tray Lock functions

Status display

shows current settings and operating status of the unit.



Product View

Front Panel



Rear Panel



Specifications

| Recording Function | | Input and Output ^{*4} | | | |
|--|--|--|---|---|---------------------------------------|
| HDD storage capacity | 500GB | Video input/output | Composite video input/output | | |
| Video recording system | MPEG4 AVC/H.264, MPEG-2 TS, MPEG-2 PS, JPEG (Still) | Audio input/output | 2Vrms (pin jack) | | |
| Audio recording system | Dolby Digital, Linear PCM, MPEG1 Layer2 | S-video input/output | Y: 1.0 Vp-p, 75 Ω; C: 0.286 Vp-p, 75 Ω (SR-HD2500US) / C: 0.3 Vp-p, 75 Ω (SR-HD2500EU) | | |
| Direct recording from AUX to BD/DVD | HD-SDI, SD-SDI, HDV (iLink), DV (iLink), S-Video / Video (L1) | IEEE1394 input | 4-pin for DV, HDV IN | | |
| Importable data format (to HDD) | MOV ^{*1} , AVCHD, HDV, DV, JPEG, BDAV, BDMV, DVD-Video/VR, Everio backup disc | Remote input | 3.5 mm diameter jack | | |
| Recordable Media | | Serial command | RC-232C (D-sub 9-pin) | | |
| Blu-ray Disc | BD-R (SL/DL), BD-RE (SL/DL) ^{*2} | Component video output | Y: 1.0 Vp-p, 75 Ω CB/CR, PB/PR: 0.7 Vp-p, 75 Ω | | |
| DVD | DVD-R (SL/DL), DVD-RW | HDMI output | 19-pin type A (Deep Color, x.v.Color, Ver.1.3a) | | |
| SD Card (Still) | SDHC, SD | USB terminal | USB2.0 | | |
| Playable Media | | SDI | Input | 1 (BNC) | |
| Blu-ray Disc | BD-Video, BD-R (SL/DL), BD-RE (SL/DL) | | Output (shares DIRECT OUT/MONITOR OUT) | 1 (BNC) | |
| DVD | DVD-Video, DVD-R (SL/DL), DVD-RW, DVD-RAM, DVD+R (SL/DL), +RW | Exclusive SDI through output (ACTIVE THROUGH) | | 1 (BNC) | |
| CD | CD, CD-R, CD-RW | SD memory card | | SDHC, SD | |
| SD Card (Video ^{*3} /Still) | SDHC, SD | Accessories | | | |
| Recordable/Playable Disc Format | | Supplied accessories | AC power cord (US: x1; EU: x2) infrared remote control unit, "AA" battery x 2 | | |
| Recordable disc format | BDAV | BD-R (SL/DL), BD-RE (SL/DL) ^{*2} | General | | |
| | BDMV (HDMV) | BD-R (SL/DL), BD-RE (SL/DL) ^{*2} | Power requirements | SR-HD2500US: AC 120 V, 60 Hz SR-HD2500EU: AC220V - 240V, 50/60Hz | |
| | DVD-Video | DVD-R (SL/DL)/-RW | Power consumption | Power on | 42 W |
| | DVD-VR mode | DVD-R (SL/DL)/-RW | | Stand-by | 3W (SR-HD2500US) / 0.5W (SR-HD2500EU) |
| Playable disc format | JPEG | BD-RE, SDHC, SD | Temperature | Operating | 41°F to 95°F (5°C to 35°C) |
| | BDAV | BD-R (SL/DL), BD-RE (SL/DL) ^{*2} | | Storage | -4°F to 140°F (-20°C to 60°C) |
| | BDMV (HDMV) | BD-R (SL/DL), BD-RE (SL/DL) ^{*2} | Operating position | Horizontal only | |
| | DVD-Video | DVD-R (SL/DL)/-RW, +RW | Dimensions (W x H x D) | 17-1/10" x 2-6/8" x 13-13/16" (435 mm x 70 mm x 351 mm) | |
| | DVD-VR (CPRM enabled) | DVD-R (SL/DL)/-RW, DVD-RAM | Weight | 11.2 lbs (5.3 kg) | |
| | AVCHD | DVD-R (SL/DL)/-RW, DVD-RAM, SDHC, SD | ^{*1} : From the GY-HM700 or GY-HM100 series camcorder using HQ mode (35Mbps/s) and SP mode (25Mbps/s and 19Mbps/s) | | |
| | JPEG | BD-RE, SDHC, SD, Everio backup disc (DVD-R/-RW) | ^{*2} : Not compatible with Ver. 1.0 (23GB) | | |
| CD-DA | Yes | ^{*3} : Playability depends on the data format and conditions. | | | |
| Everio back-up disc | Yes | ^{*4} : Corresponds to copy protection. | | | |
| Recording Mode | | Dubbed disc may not be in accordance with the official Blu-ray specifications depending on the conditions. | | | |
| MPEG-2 TS | DR | | | | |
| H.264 (MPEG-4 AVC) | AF, AN, AL, AE | | | | |
| MPEG-2 PS | XP, SP, LP, EP, FR | | | | |

Recommended JVC camcorders

As the SR-HD2500 supports the .MOV (19Mbps, 25Mbps and 35Mbps) recording format, JVC recommends footage be recorded on the ProHD camcorder.



GY-HM790/750


Compact shoulder 3-CCD Camcorder with 14X Canon lens



GY-HM150

Compact Hand-held 3-CCD Camcorder

External Dimensions

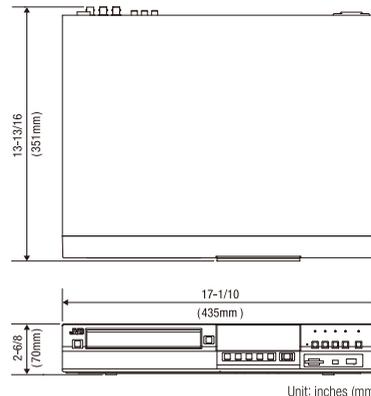

Unit: inches (mm)

E. & O.E. Design and specifications are subject to change without notice.

"Blu-ray Disc" and "Blu-ray Disc" logo are trademarks. "AVCHD" and the "AVCHD" logo are trademarks of Panasonic Corporation and Sony Corporation. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. "Dolby" and the double-D symbol are trademarks of Dolby Laboratories. The i.LINK logo is a trademark of Sony Corporation. DTS is a registered trademark and the DTS logos, Symbol, DTS-HD and DTS-HD Master Audio Essential are trademarks of Digital Theater Systems, Inc. The SD and SDHC logos are trademarks of the SD Card Association. Java and all Java based trademarks and logos are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries. All other brand or product names may be trademark and/or registered trademarks of their respective holders. Any rights not expressly granted herein are reserved.

Copyright © 2012 JVC KENWOOD Corporation. All Rights Reserved.



DISTRIBUTED BY

www.jvc.com

Printed in Japan

KCS-8430

"JVC" is the trademark or registered trademark of JVC KENWOOD Corporation.